

IN_RING ZOOM

Code	09.0599.13.930.BK
Color	Black
Input Wattage	13W
Luminaire luminous flux	615-1040Lm
Luminaire efficacy	43-80lm/W
CCT	3000K
CRI	CRI>90
Voltage (V)	48V
Warranty	5 Years
IP Grade	IP20

OPTICAL


Type	CREE LED
Light beam angle	15°-50°
Light distribution	Symmetric

ELECTRICAL


Driver	Included
Power factor	0.8
LED input Voltage (nominal)	36V
LED input Current (nominal)	350mA
Dimming	NO DIM
Electrical insulation class	Class III

OTHER DATA

Track type	IN_RING TRACK 48V DC
Swivel angle	90°
Rotation angle	355°
Materials	Aluminium / Polycarbonate
Weight	0.26 kg
Gross weight	0.298 kg


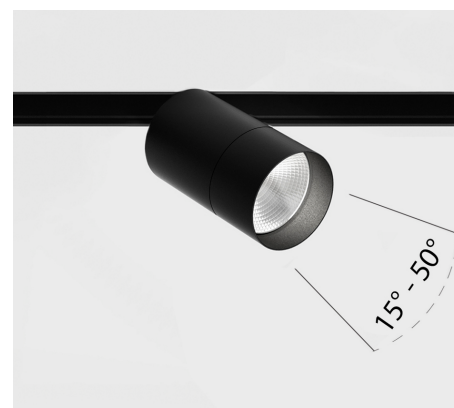


DIMENSIONS

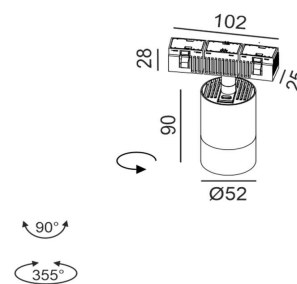



CERTIFICATIONS



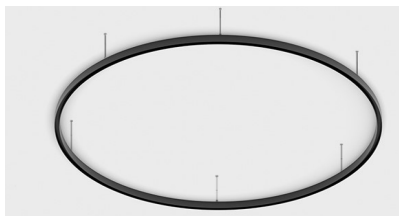


IN_RING TRACK

	Code	Dimensions (mm):L×W×H	Color
IN_RING 200	09.C200.BK	2000 x 30 x 54	Black
IN_RING 200	09.C200.WH	2000 x 30 x 54	White
IN_RING 300	09.C300.BK	3000 x 30 x 54	Black
IN_RING 300	09.C300.WH	3000 x 30 x 54	White
IN_RING 500	09.C500.BK	5000 x 30 x 54	Black
IN_RING 500	09.C500.WH	5000 x 30 x 54	White

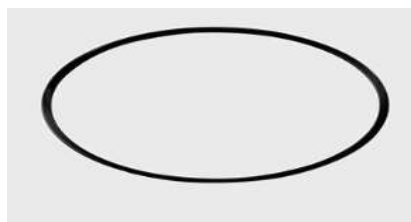

IN_RING TRACK R

	Code	Dimensions (mm):L×W×H	Color
IN_RING TRACK R 100	09.R100.BK	1000 x 58 x 54	Black
IN_RING TRACK R 200	09.R200.BK	2000 x 58 x 54	Black
IN_RING TRACK R 300	09.R300.BK	3000 x 58 x 54	Black

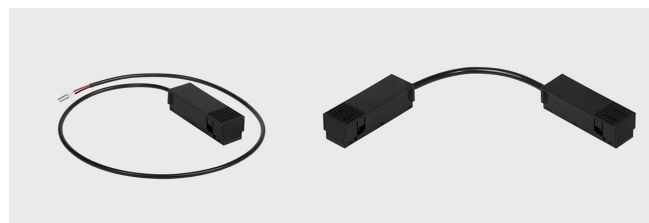

ACCESSORIES

	Code	Dimensions (mm):L×W×H	Color
IN_RING LIVE END 600	09.CLE60.BK	67.7 x 27.8	Black
IN_RING LIVE END 600	09.CLE60.WH	67.7 x 27.8	White
IN_RING ELECTRICAL JOINT FLEX	09.C2LE60.BK	67.7 x 27.8	Black
IN_RING ELECTRICAL JOINT FLEX	09.C2LE60.WH	67.7 x 27.8	White

IN_RING LIVE END 600



IN_RING ELECTRICAL JOINT FLEX



CERTIFICATIONS

