

# IN\_LINE LINEA 205

Code	06.2050.6.930.DALI.BK
Color	Black
Input Wattage	6 W
Luminaire luminous flux	406 Lm
Luminaire efficacy	67.6 lm/W
CCT	3000K
CRI	>90
Voltage (V)	48V
Warranty	5 Years
IP Grade	IP20

## OPTICAL


Type	BRIDGELUX LED
Light beam angle	110°
Light distribution	Symmetric

## ELECTRICAL


Driver	Included
Power factor	0.8
LED input Voltage (nominal)	14.5V
LED input Current (nominal)	350mA
Dimming	DALI
Electrical insulation class	Class III

## OTHER DATA


Track type	IN_LINE TRACK 48V DC
Materials	Aluminium / Opal polycarbonate
Weight	0.23 kg
Gross weight	0.263 kg

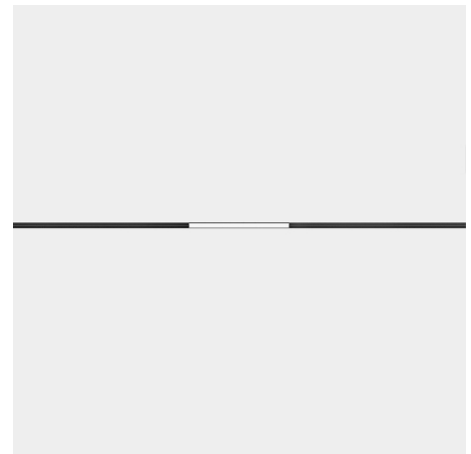

## DIMENSIONS





## ACCESSORY



## CERTIFICATIONS






## IN\_LINE TRACK T

	Code	Dimensions (mm): LxWxH	Color
IN_LINE TRACK T 48V 2m*	06.T200.BK	2000 x 40 x 54	Black
IN_LINE TRACK T 48V 3m*	06.T300.BK	3000 x 40 x 54	Black
IN_LINE CORNER T HR*	06.T90HR.BK	85 x 85 x 54	Black
IN_LINE END CAP T*	06.TECAP.BK	40 x 7.5 x 54	Black
Mounting bracket*	06.TCB.BK		Black
IN_LINE TRACK T MEC JOINT*	06.TLNCON		Black

\*Electrical connection not included



IN\_LINE CORNER R HR



MOUNTING BRACKET



IN\_LINE TRACK T MEC JOINT\*

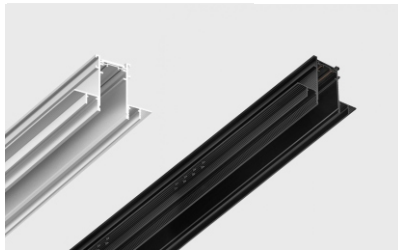


## IN\_LINE TRACK R


	Code	Dimensions (mm): LxWxH	Color
IN_LINE TRACK T 48V 2m*	06.R200.WH	2000 x 30 x 54	White
IN_LINE TRACK T 48V 2m*	06.R200.BK		Black
IN_LINE TRACK T 48V 3m*	06.R300.WH	3000 x 30 x 54	White
IN_LINE TRACK T 48V 3m*	06.R300.BK		Black
IN_LINE CORNER R HR *	06.R90HR.WH	82 x 82 x 54	White
IN_LINE CORNER R HR *	06.R90HR.BK		Black
IN_LINE CORNER R IN *	06.R90IN.WH	82 x 82 x 54	White
IN_LINE CORNER R IN *	06.R90IN.BK		Black
IN_LINE CORNER R OUT *	06.R90OUT.WH	82 x 82 x 54	White
IN_LINE CORNER R OUT *	06.R90OUT.BK		Black
IN_LINE END CAP R/S *	06.R/SECAP.WH	30 x 4 x 54	White
IN_LINE END CAP R/S *	06.R/SECAP.BK		Black

\*Electrical connection not included


IN\_LINE CORNER R HR



IN\_LINE CORNER R IN





IN\_LINE CORNER R OUT



## CERTIFICATIONS



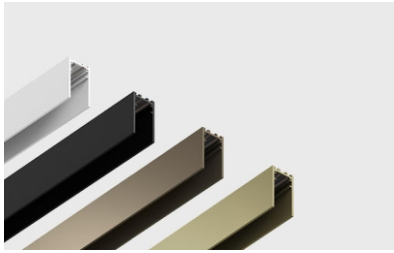


## IN\_LINE TRACK S


	Code	Dimensions (mm): LxWxH	Color
IN_LINE TRACK S 48V 2m*	06.S200.WH	2000 x 30 x 54	White
IN_LINE TRACK S 48V 2m*	06.S200.BK		Black
IN_LINE TRACK S 48V 2m*	06.S200.LG		Like gold
IN_LINE TRACK S 48V 2m*	06.S200.LB		Like brass
IN_LINE TRACK S 48V 3m*	06.S300.WH	3000 x 30 x 54	White
IN_LINE TRACK S 48V 3m*	06.S300.BK		Black
IN_LINE CORNER S HR *	06.S90HR.WH	58 x 58 x 54	White
IN_LINE CORNER S HR *	06.S90HR.BK		Black
IN_LINE CORNER S HR *	06.S90HR.LG		Like gold
IN_LINE CORNER S HR *	06.S90HR.LB		Like brass
IN_LINE CORNER S IN *	06.S90IN.WH	82 x 82 x 54	White
IN_LINE CORNER S IN *	06.S90IN.BK		Black
IN_LINE CORNER S OUT *	06.S90OUT.WH	82 x 82 x 54	White
IN_LINE CORNER S OUT *	06.S90OUT.BK		Black
IN_LINE CORNER 90	06.SE90HR.WH	70 x 70 x 54	White
IN_LINE CORNER 90	06.SE90HR.BK		Black
IN_LINE CORNER 180	06.SE180HR.WH	110 x 30 x 54	White
IN_LINE CORNER 180	06.SE180HR.BK		Black
IN_LINE CORNER X	06.SEQHR.WH	110 x 110 x 54	White
IN_LINE CORNER X	06.SEQHR.BK		Black
IN_LINE CORNER 120	06.SE120HR.WH	116 x 60 x 54	White
IN_LINE CORNER 120	06.SE120HR.BK		Black
IN_LINE CORNER T (right)	06.SETRHR.WH	110 x 70 x 54	White
IN_LINE CORNER T (right)	06.SETRHR.BK		Black
IN_LINE CORNER T (left)	06.SETLHR.WH	110 x 70 x 54	White
IN_LINE CORNER T (left)	06.SETLHR.BK		Black
IN_LINE END CAP R/S *	06.R/SECAP.WH	30 x 4 x 54	White
IN_LINE END CAP R/S *	06.R/SECAP.BK		Black
IN_LINE END CAP R/S *	06.R/SECAP.LG		Like gold
IN_LINE END CAP R/S *	06.R/SECAP.LB		Like brass

\*Electrical connection not included


IN\_LINE CORNER R HR




IN\_LINE CORNER R IN




IN\_LINE CORNER R OUT




IN\_LINE CORNER 90




IN\_LINE CORNER 180




IN\_LINE CORNER X




IN\_LINE CORNER 120



IN\_LINE CORNER T (left)





IN\_LINE CORNER T (right)



## CERTIFICATIONS






## IN\_LINE SHORT TRACK S

	Code	Dimensions (mm): LxWxH	Color
IN_LINE SHORT TRACK S 48V 3m with caps (2pcs)*	<b>06.SS300.WH</b>	3000 x 30 x 37	White
IN_LINE SHORT TRACK S 48V 3m with caps (2pcs)*	<b>06.SS300.BK</b>		Black
IN_LINE SHORT CORNER S HR*	<b>06.SS90HR.WH</b>	58 x 58 x 27	White
IN_LINE SHORT CORNER S HR*	<b>06.SS90HR.BK</b>		Black
IN_LINE SHORT END CAP*	<b>06.SSCAP.WH</b>	30 x 3 x 37	White
IN_LINE SHORT END CAP*	<b>06.SSCAP.BK</b>		Black


## IN\_LINE SHORT CORNER S HR



\*Electrical connection not included


## ALL 48V TRACK IN\_LINE

### IN\_LINE LIVE END 600




	Code	Dimensions (mm): LxWxH	Color
Feed cable	<b>06.SLE60.WH</b>	600	White
	<b>06.SLE60.BK</b>	600	Black

### IN\_LINE LIVE END 1500




	Code	Dimensions (mm): LxWxH	Color
Feed cable	<b>06.SLE150.WH</b>	1500	White
	<b>06.SLE150.BK</b>	1500	Black

### IN\_LINE ELECTRICAL JOINT



	Code	Color
Electrical joint live end for track, without cable	<b>06.SLE00.WH</b>	White
	<b>06.SLE00.BK</b>	Black

### IN\_LINE ELECTRICAL JOINT FLEX




	Code	Color
Electrical joint flex connector for tack	<b>06.S2LE60.WH</b>	White
	<b>06.S2LE60.BK</b>	Black

## CERTIFICATIONS




## ALL 48V TRACK IN\_LINE

## IN\_LINE MEC JOINT



	Code	Color
Mechanical linear connector for track	06.R/SLNCON	Black

## IN\_LINE COVER R/S



16  
27

	Code	Dimensions (mm): LxWxH	Color
Track cover for Recessed & Surface	06.R/SCOV200.WH	2000 x 26 x 5	White
	06.R/SCOV200.BK		Black
	06.R/SCOV300.WH	3000 x 26 x 5	White
	06.R/SCOV300.BK		Black

## IN\_LINE SUSP KIT



15

1500


	Code	Dimensions (mm): LxWxH	Color
Suspension	06.SS150.WH	1500 x 26 x 5	White
	06.SS150.BK		Black
	06.SS150.ZZ		Steel

## CERTIFICATIONS



## ALL 48V TRACK IN\_LINE


## POWER SUPPLY DIMMING



Code	Dimensions (mm): LxWxH	Power Watt	Color
<b>28001233</b>	235 x 100 x 31	75	White
<b>28001044</b>	235 x 100 x 31	150	White

CE IP20 48V

## POWER SUPPLY DIMMING



Code	Dimensions (mm): LxWxH	Power Watt	Color
<b>28000815</b>	360 x 40 x 21	75	White/Grey
<b>28001235</b>	360 x 40 x 21	150	White/Grey

CE IP20 48V

## CERTIFICATIONS

