

IN_LINE LINEA 800

Code	06.8000.18.930.BK
Color	Black
Input Wattage	18 W
Luminaire luminous flux	1450 Lm
Luminaire efficacy	80.5 lm/W
CCT	3000K
CRI	>90
Voltage (V)	48V
Warranty	5 Years
IP Grade	IP20

OPTICAL


Type	BRIDGELUX LED
Light beam angle	110°
Light distribution	Symmetric

ELECTRICAL


Driver	Included
Power factor	0.8
LED input Voltage (nominal)	39V
LED input Current (nominal)	500mA
Dimming	NO DIM
Electrical insulation class	Class III

OTHER DATA

Track type	IN_LINE TRACK 48V DC
Materials	Aluminium / Opal polycarbonate
Weight	0.63 kg
Gross weight	0.76 kg

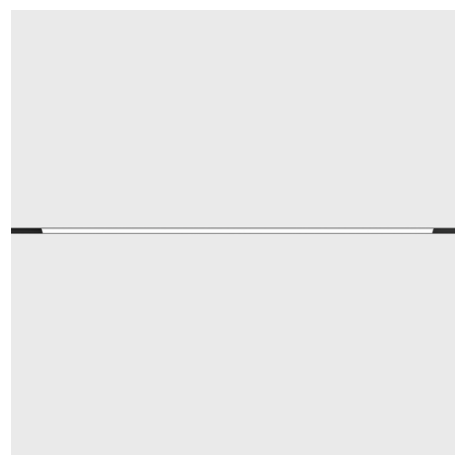

DIMENSIONS


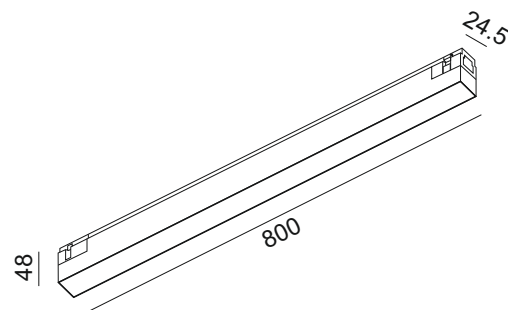


ACCESSORY



CERTIFICATIONS






IN_LINE TRACK T

	Code	Dimensions (mm): LxWxH	Color
IN_LINE TRACK T 48V 2m*	06.T200.BK	2000 x 40 x 54	Black
IN_LINE TRACK T 48V 3m*	06.T300.BK	3000 x 40 x 54	Black
IN_LINE CORNER T HR*	06.T90HR.BK	85 x 85 x 54	Black
IN_LINE END CAP T*	06.TECAP.BK	40 x 7.5 x 54	Black
Mounting bracket*	06.TCB.BK		Black
IN_LINE TRACK T MEC JOINT*	06.TLNCON		Black

*Electrical connection not included



IN_LINE CORNER R HR



MOUNTING BRACKET



IN_LINE TRACK T MEC JOINT*

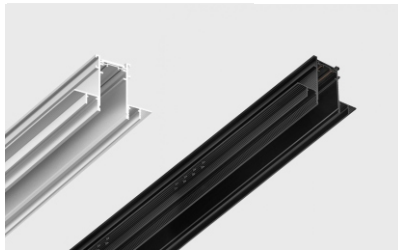


IN_LINE TRACK R


	Code	Dimensions (mm): LxWxH	Color
IN_LINE TRACK T 48V 2m*	06.R200.WH	2000 x 30 x 54	White
IN_LINE TRACK T 48V 2m*	06.R200.BK		Black
IN_LINE TRACK T 48V 3m*	06.R300.WH	3000 x 30 x 54	White
IN_LINE TRACK T 48V 3m*	06.R300.BK		Black
IN_LINE CORNER R HR *	06.R90HR.WH	82 x 82 x 54	White
IN_LINE CORNER R HR *	06.R90HR.BK		Black
IN_LINE CORNER R IN *	06.R90IN.WH	82 x 82 x 54	White
IN_LINE CORNER R IN *	06.R90IN.BK		Black
IN_LINE CORNER R OUT *	06.R90OUT.WH	82 x 82 x 54	White
IN_LINE CORNER R OUT *	06.R90OUT.BK		Black
IN_LINE END CAP R/S *	06.R/SECAP.WH	30 x 4 x 54	White
IN_LINE END CAP R/S *	06.R/SECAP.BK		Black

*Electrical connection not included


IN_LINE CORNER R HR



IN_LINE CORNER R IN





IN_LINE CORNER R OUT



CERTIFICATIONS



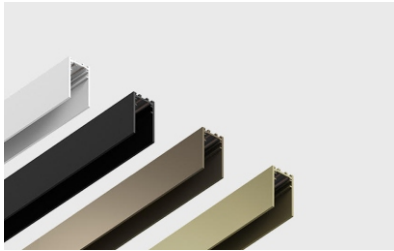


IN_LINE TRACK S


	Code	Dimensions (mm): LxWxH	Color
IN_LINE TRACK S 48V 2m*	06.S200.WH	2000 x 30 x 54	White
IN_LINE TRACK S 48V 2m*	06.S200.BK		Black
IN_LINE TRACK S 48V 2m*	06.S200.LG		Like gold
IN_LINE TRACK S 48V 2m*	06.S200.LB		Like brass
IN_LINE TRACK S 48V 3m*	06.S300.WH	3000 x 30 x 54	White
IN_LINE TRACK S 48V 3m*	06.S300.BK		Black
IN_LINE CORNER S HR *	06.S90HR.WH	58 x 58 x 54	White
IN_LINE CORNER S HR *	06.S90HR.BK		Black
IN_LINE CORNER S HR *	06.S90HR.LG		Like gold
IN_LINE CORNER S HR *	06.S90HR.LB		Like brass
IN_LINE CORNER S IN *	06.S90IN.WH	82 x 82 x 54	White
IN_LINE CORNER S IN *	06.S90IN.BK		Black
IN_LINE CORNER S OUT *	06.S90OUT.WH	82 x 82 x 54	White
IN_LINE CORNER S OUT *	06.S90OUT.BK		Black
IN_LINE CORNER 90	06.SE90HR.WH	70 x 70 x 54	White
IN_LINE CORNER 90	06.SE90HR.BK		Black
IN_LINE CORNER 180	06.SE180HR.WH	110 x 30 x 54	White
IN_LINE CORNER 180	06.SE180HR.BK		Black
IN_LINE CORNER X	06.SEQHR.WH	110 x 110 x 54	White
IN_LINE CORNER X	06.SEQHR.BK		Black
IN_LINE CORNER 120	06.SE120HR.WH	116 x 60 x 54	White
IN_LINE CORNER 120	06.SE120HR.BK		Black
IN_LINE CORNER T (right)	06.SETRHR.WH	110 x 70 x 54	White
IN_LINE CORNER T (right)	06.SETRHR.BK		Black
IN_LINE CORNER T (left)	06.SETLHR.WH	110 x 70 x 54	White
IN_LINE CORNER T (left)	06.SETLHR.BK		Black
IN_LINE END CAP R/S *	06.R/SECAP.WH	30 x 4 x 54	White
IN_LINE END CAP R/S *	06.R/SECAP.BK		Black
IN_LINE END CAP R/S *	06.R/SECAP.LG		Like gold
IN_LINE END CAP R/S *	06.R/SECAP.LB		Like brass

*Electrical connection not included


IN_LINE CORNER R HR




IN_LINE CORNER R IN




IN_LINE CORNER R OUT




IN_LINE CORNER 90




IN_LINE CORNER 180




IN_LINE CORNER X




IN_LINE CORNER 120



IN_LINE CORNER T (left)





IN_LINE CORNER T (right)



CERTIFICATIONS






IN_LINE SHORT TRACK S

	Code	Dimensions (mm): LxWxH	Color
IN_LINE SHORT TRACK S 48V 3m with caps (2pcs)*	06.SS300.WH	3000 x 30 x 37	White
IN_LINE SHORT TRACK S 48V 3m with caps (2pcs)*	06.SS300.BK		Black
IN_LINE SHORT CORNER S HR*	06.SS90HR.WH	58 x 58 x 27	White
IN_LINE SHORT CORNER S HR*	06.SS90HR.BK		Black
IN_LINE SHORT END CAP*	06.SSCAP.WH	30 x 3 x 37	White
IN_LINE SHORT END CAP*	06.SSCAP.BK		Black


IN_LINE SHORT CORNER S HR



*Electrical connection not included


ALL 48V TRACK IN_LINE

IN_LINE LIVE END 600




	Code	Dimensions (mm): LxWxH	Color
Feed cable	06.SLE60.WH	600	White
	06.SLE60.BK	600	Black

IN_LINE LIVE END 1500




	Code	Dimensions (mm): LxWxH	Color
Feed cable	06.SLE150.WH	1500	White
	06.SLE150.BK	1500	Black

IN_LINE ELECTRICAL JOINT



	Code	Color
Electrical joint live end for track, without cable	06.SLE00.WH	White
	06.SLE00.BK	Black

IN_LINE ELECTRICAL JOINT FLEX




	Code	Color
Electrical joint flex connector for tack	06.S2LE60.WH	White
	06.S2LE60.BK	Black

CERTIFICATIONS




ALL 48V TRACK IN_LINE

IN_LINE MEC JOINT



	Code	Color
Mechanical linear connector for track	06.R/SLNCON	Black

IN_LINE COVER R/S



16
27

	Code	Dimensions (mm): LxWxH	Color
Track cover for Recessed & Surface	06.R/SCOV200.WH	2000 x 26 x 5	White
	06.R/SCOV200.BK		Black
	06.R/SCOV300.WH	3000 x 26 x 5	White
	06.R/SCOV300.BK		Black

IN_LINE SUSP KIT

15



1500


	Code	Dimensions (mm): LxWxH	Color
Suspension	06.SS150.WH	1500 x 26 x 5	White
	06.SS150.BK		Black
	06.SS150.ZZ		Steel

CERTIFICATIONS



ALL 48V TRACK IN_LINE


IN_LINE POWER UNIT 100



	Code	Power Watt	Color
Power supply	06.PSU.100.WH	100	White
	06.PSU.100.BK	100	Black

CE ENE IP20 SELV 48V

IN_LINE POWER UNIT 200



	Code	Power Watt	Color
Power supply	06.PSU.200.WH	200	White
	06.PSU.200.BK	200	Black

CE ENE IP20 SELV 48V

POWER SUPPLY



	Code	Dimensions (mm): LxWxH	Power Watt	Color
	PS-60-48	162,5 x 42,5 x 32	60	Grey
	PS-100-48	190 x 52 x 37	100	Grey
	PS-150-48	191 x 63 x 37,5	150	Grey

CE IP67 48V

POWER SUPPLY



	Code	Dimensions (mm): LxWxH	Power Watt	Color
	06.PSU.100.W/O	298 x 30 x 16,5	100	Grey
	06.PSU.200.W/O	384 x 30 x 22	200	Grey
	06.PSU.250.W/O	384 x 30 x 22	250	Grey

CE IP20 48V

CERTIFICATIONS

