

# SFERA WALL S

Code	10.0613.4.930.BK
Color	Black
Input Wattage	4 W
Luminaire luminous flux	243 Lm
Luminaire efficacy	60,7 lm/W
CCT	3000K
CRI	>90
Voltage (V)	220-240V, 50/60Hz
Warranty	5 Years
IP Grade	IP20

## OPTICAL

Type	BRIDGELUX LED
Light beam angle	Opal
Light distribution	Symmetric


## ELECTRICAL

Driver	Included
Power system	6.5 W
Output Voltage	24V
Dimming	NO DIM
Input Voltage	220-240V
Input Frequency	50-60Hz

## OTHER DATA

Mounting	Surface
Construction material	Aluminium / Glass
Operating Ambient Temp.	-20 to 40 °C
Weight	0,41 kg
Gross weight	0,51 kg

## CERTIFICATIONS

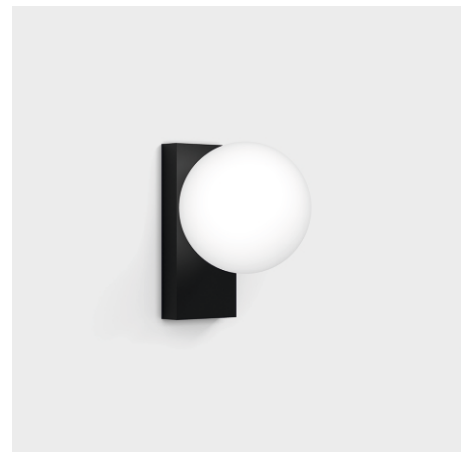

## DIMENSIONS

