

MICRO_LINE SOL MINI

Code	14.7526.7.930.DALI.BK
Color	Black
Input Wattage	6.3W
Luminaire luminous flux	605Lm
Luminaire efficacy	96lm/W
CCT	3000K
CRI	>90
Voltage (V)	48VDC
Warranty	5 Years
IP Grade	IP20

OPTICAL


Type	CREE LED
Light beam angle	38°
Light distribution	Symmetric

ELECTRICAL


Driver	Included
Power factor	0.8
LED input Voltage (nominal)	9V
LED input Current (nominal)	700mA
Dimming	DALI
Electrical insulation class	Class III

OTHER DATA

Track type	MICRO_LINE TRACK
Swivel angle	90°
Rotation angle	355°
Materials	Aluminium / Polycarbonate
Weight	0.17 kg
Gross weight	0.21 kg

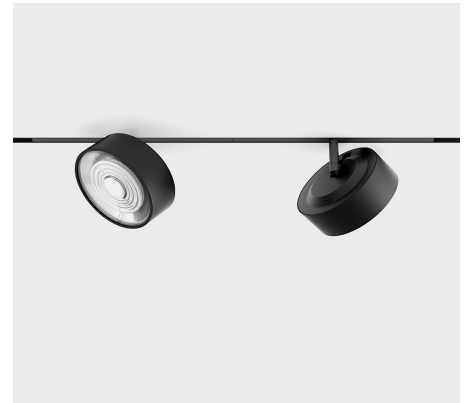


DIMENSIONS





CERTIFICATIONS

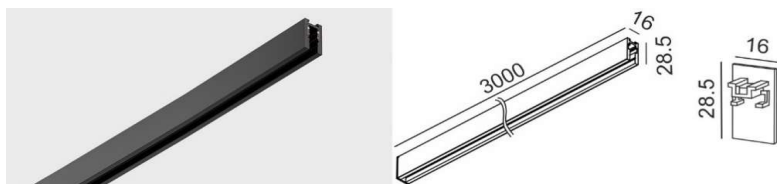

**MICRO_LINE TRACK S**


	Code	Dimensions (mm):L×W×H	Color
MICRO_LINE TRACK S 1m*	14.S100.BK	1000 x 16 x 28.5	Black
MICRO_LINE TRACK S 2m*	14.S200.BK	2000 x 16 x 28.5	Black
MICRO_LINE TRACK S 3m*	14.S300.BK	3000 x 16 x 28.5	Black
MICRO_LINE END CAP S*	14.SSCAP.BK	00 x 16 x 28.5	Black
MICRO_LINE CORNER S HR*	14.S90HR.BK	35 x 35 x 28.5	Black
MICRO_LINE CORNER S IN*	14.S90IN.BK	49 x 49 x 16	Black
MICRO_LINE CORNER S OUT*	14.S90OUT.BK	49.5 x 49.5 x 16	Black
MICRO_LINE MEC JOINT*	14.R/SLNCON	19 x 12.5 x 10	Black

*Electrical connection not included

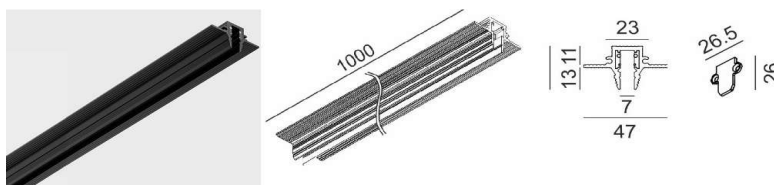
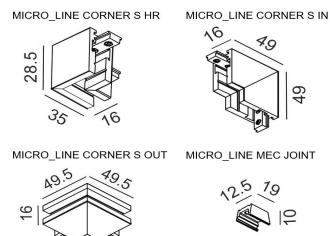
**MICRO_LINE TRACK R**

	Code	Dimensions (mm):L×W×H	Color
MICRO_LINE TRACK R 48V DC 1m*	14.R100.BK	1000 x 47 x 26	Black
MICRO_LINE TRACK R 48V DC 2m*	14.R200.BK	2000 x 47 x 26	Black
MICRO_LINE TRACK R 48V DC 3m*	14.R300.BK	3000 x 47 x 26	Black
MICRO_LINE END CAP R*	14.R/SECAP.BK	00 x 26 x 26	Black
MICRO_LINE CORNER R HR*	14.R90HR.BK	64 x 64 x 26	Black
MICRO_LINE CORNER R IN*	14.R90IN.BK	46 x 46 x 47	Black
MICRO_LINE CORNER R OUT*	14.R90OUT.BK	48 x 48 x 47	Black
MICRO_LINE MEC JOINT*	14.R/SLNCON	19 x 12.5 x 10	Black

*Electrical connection not included

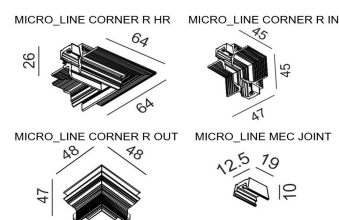**FOR ALL MICRO_LINE TRACKS**

	Code	Dimensions (mm):L×W×H	Color
MICRO_LINE ELECTRICAL JOINT FLEX	14.S2LE20.BK	200 x 7 x 23	Black
MICRO_LINE LIVE END	14.SLE60.BK	100 x 7 x 23	Black



CERTIFICATIONS

